SanitaCamp

MODULAR SANITARY ARCHITECTURE • OUTDOOR HOSPITALITY

TECHNICAL DATASHEET

Ref: SC-MB32-2026-EU

Multi-Bay Shared 3+2 Sanitary Units (High-Capacity Washblock)

Turnkey, communal sanitary building engineered for European campsites, holiday parks, sports complexes, and seasonal event grounds. Features 3 private full-height toilet cubicles, 2 partitioned water-saving urinals, and 3 ceramic washbasin stations within an insulated 240 × 450 cm structural footprint—delivering seamless traffic flow during peak hours.

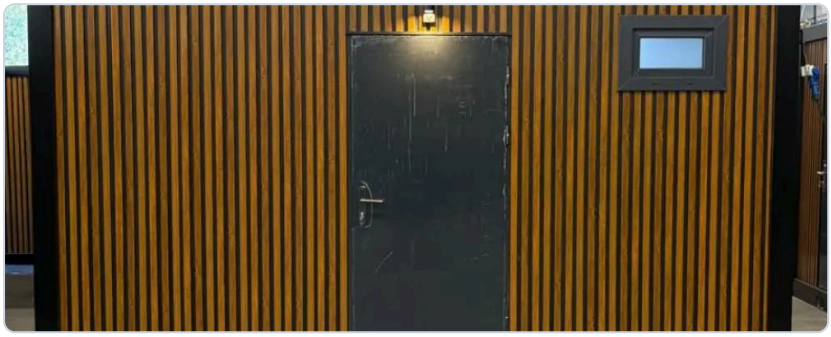

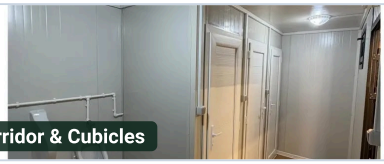

Corridor & Cubicles

Floor Plan (240x450 cm)

ARCHITECTURAL EXTERIOR FINISHES

SafranCity Series
Warm wood-look composite slatted facade over an anthracite frame. Harmonizes seamlessly with glamping and nature parks.

AntraCity Series
Full RAL 7016 Anthracite Grey modern architectural finish. Contemporary styling for coastal pitches & motorhome resorts.

PrimeCity Series
Clean RAL 9002 Off-White paneling. Sunlight-reflective, bright, and hygienic aesthetic for commercial campsites.

Engineering Specifications — European Commercial Standards

PARAMETER	TECHNICAL DETAIL & MATERIAL STANDARD
Configuration	High-Capacity Washblock: 3× Private WC Cubicles + 2× Partitioned Urinals + 3× Ceramic Washbasins
External Dimensions	240 cm (Width) × 450 cm (Length) × 250 cm (Height)
Approximate Weight	approx. 780 – 840 kg (Heavy-duty cold-formed galvanized structural steel chassis)
Chassis & Handling	Integrated forklift channels & reinforced crane lifting eyes for rapid site placement
Wall & Ceiling Insulation	40 mm EPS high-density insulated composite sandwich panels (Thermal comfort & acoustic control)
Subfloor & Floor Finish	14 mm heavy-duty fiber cement subfloor + 2 mm commercial non-slip PVC vinyl (wash-down rated)
Sanitary Ware Included	3× Ceramic toilets with cisterns, 2× ceramic wall-hung urinals with divider, 3× ceramic basins with mirrors
Electrical & Ventilation	16A RCD distribution fuse box, IP-rated moisture-sealed LED ceiling lights, mechanical exhaust fans
Plumbing Connections	Rear 1/2" clean cold/hot water inlet + rear 110 mm gravity sewer discharge outlet (integrated subfloor manifold)
Door & Windows	90 × 200 cm insulated steel entrance door with cylinder lock + tilt-and-turn PVC ventilation window

High-Throughput Crowd Management
Simultaneously accommodates up to 8 guests across separate WC cubicles, urinals, and vanity stations to eliminate morning delays.

Plug-and-Play Municipal Hookup
All fixture drainage lines merge internally into a single rear 110 mm sewer connection, avoiding expensive ground piping.

Direct Manufacturer: In-house production plant in Sakarya, Türkiye.
Logistics: Export-wrapped and delivered directly via curtain-sided mega-trailers across Europe.

www.sanitacamp.com
info@sanitacamp.com